



***DAPOW* 大跑®**

2023

PRODUCT BROCHURE



Company profile



Company profile

Zhejiang Dapao Technology CO.,LTD, is a factory with capacity of designing, developing, manufacturing and selling of high and electrical treadmill and also other various fitness equipment. The factory occupied 18000 square meters. Since its establishment, the company has been adhering to the business philosophy of "survival by quality, development by reputation", and now Dapao has grown into one of the outstanding enterprises with considerable scale and influence in the industry, and will be committed to becoming a well-known brand in the fitness equipment industry.

Dapao adheres to the corporate values of "client first, integrity, practicability, enterprise and dedication" and pursues the business philosophy of "clients first, employees second and shareholders third", adheres to the altruistic thinking, creates value for clients, provides a platform for employees, and strives to build a sense of happiness, belonging and honor for employees. Employees are the biggest wealth of the enterprise, strict requirements in work, human management in life, adhere to do a temperature and human interest of the enterprise. The company continues to introduce domestic top talents and advanced technology, constantly improve the production process, enhance the production quality standards, and strive to create greater industry value, attract and gather more high-quality clients, high-quality talents and high-quality suppliers to build a better Dapao.



Company Culture



Vision

A fitness equipment industry

Mission

Create value for trade partners

Value


Client first, integrity, practicability

Talent

Those who are capable in, incapable out



Machine Shop

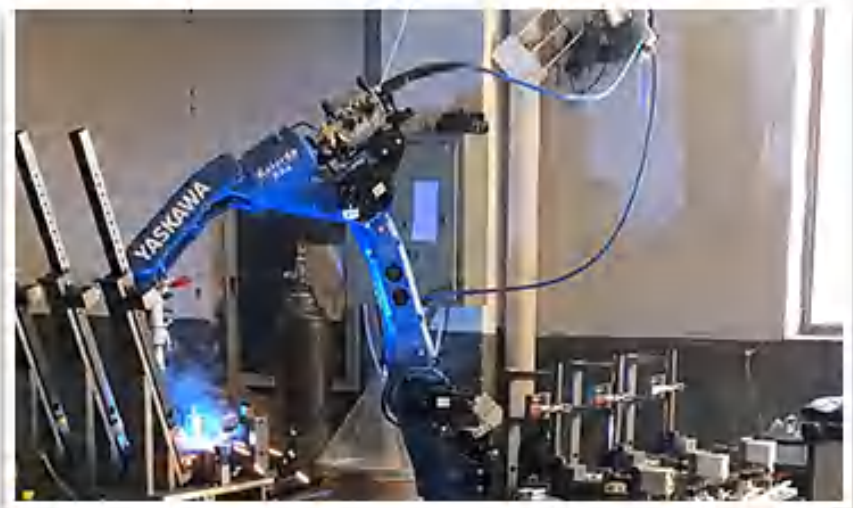




Production Workshop








Semi-product Warehouse

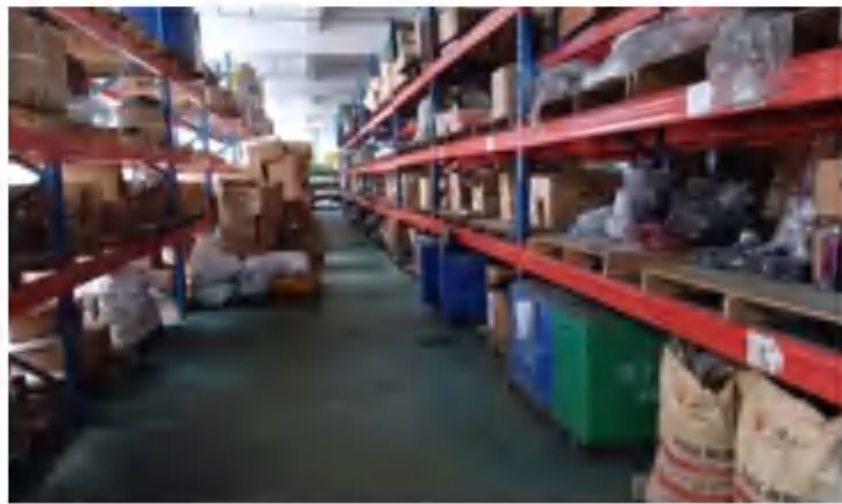



Laboratory

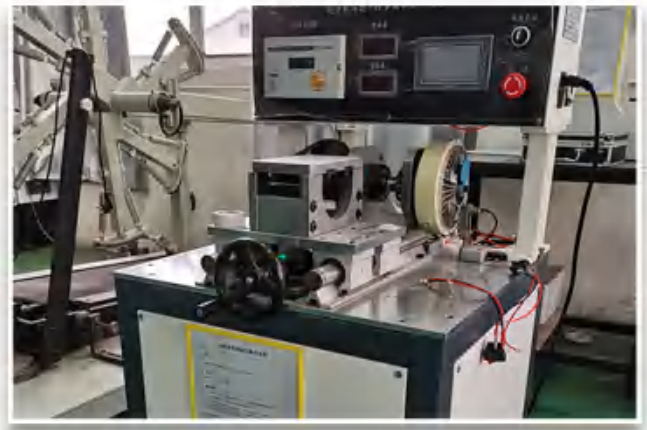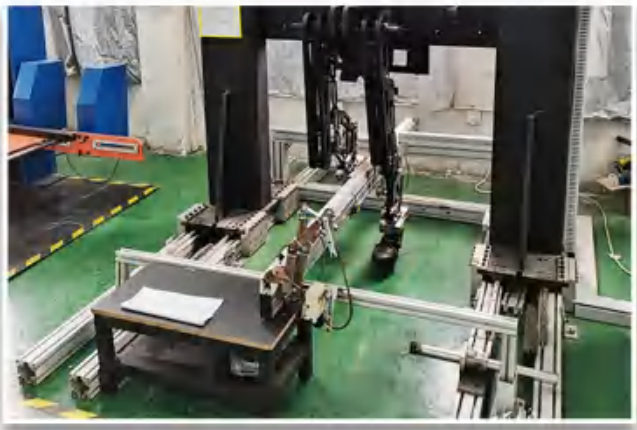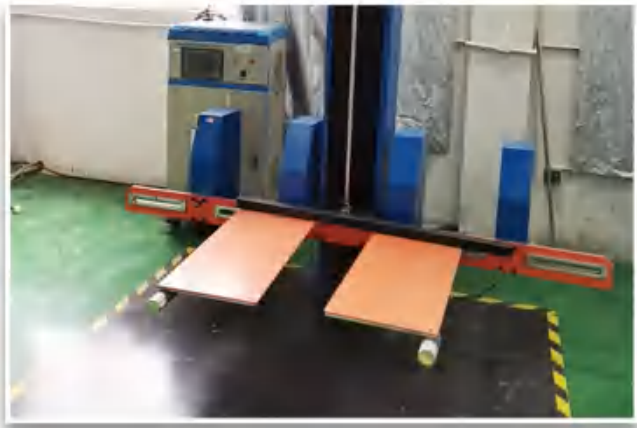









Home treadmill

 BSCI  SGS  EN957  RoHS  CE  ISO9001:2015

TREADMILL SERIES



Device Parameters 1051

 Motor power	DC4.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-20KM/H
 Running area	1400X510MM
 G.W/N.W	105KG/85KG
 Max. load capacity	150KG
 Package size	1840*870*545mm
 Loading QTY	77PCS/40'HQ

Home treadmill











SGS



EN957 RoHS CE ISO9001:2015



Device Parameters C7-530S

	Motor power	DC4.0HP
	Voltage	220-240V/110-120V
	Speed range	1.0-20KM/H
	Running area	1430X530MM
	G.W/N.W	116.5KG/99.5KG
	Max. load capacity	130KG
	Package size	1910*1040*410mm
	Loading QTY	86PCS/40'HQ

Optional AC motor

TREADMILL SERIES



Home treadmill



BSCI SGS











EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters C6-530S

 Motor power	DC4.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-20KM/H
 Running area	1430X530mm
 G.W/N.W	116.5KG/99.5KG
 Max. load capacity	130KG
 Package size	1910*1040*410mm
 Loading QTY	86PCS/40'HQ

Optional AC motor


Home treadmill



SGS





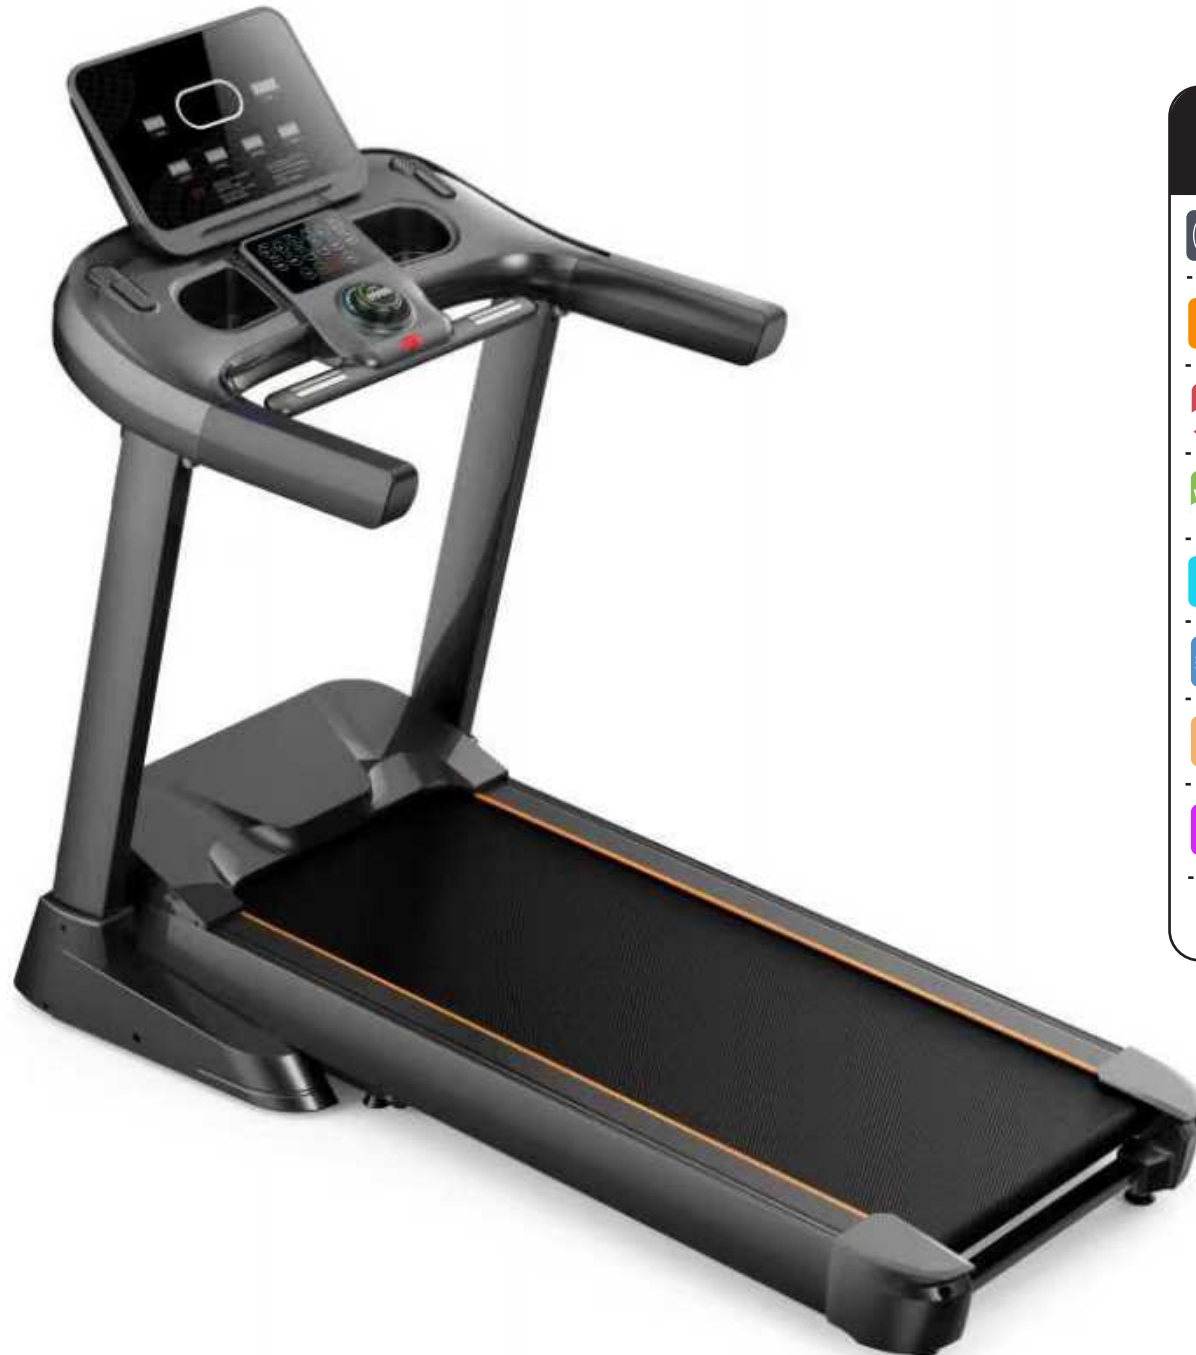





EN957 RoHS CE ISO9001:2015



TREADMILL SERIES



Device Parameters C5-520S

 Motor power	DC3.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-18KM/H
 Running area	1380X520mm
 G.W/N.W	99.5KG/81KG
 Max. load capacity	130KG
 Package size	1850*960*420mm
 Loading QTY	90PCS/40HQ

Optional AC motor

Home treadmill



SGS











EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters C3-450

 Motor power	DC2.5HP
 Voltage	220-250V/110-125V
 Speed range	1.0-14.8KM/H
 Running area	450X1200MM
 G.W/N.W	46KG/39KG
 Max. load capacity	120KG
 Package size	1490X710X190mm
 Loading QTY	156PCS/20GP 360PCS/40HQ

Home treadmill



SGS



EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters X5-460	
Motor power	DC3.5HP
Voltage	220-240V/110-120V
Speed range	1.0-16KM/H
Running area	460X1220MM
G.W/N.W	45KG/40KG
Max. load capacity	120KG
Package size	1700X870X175MM
Loading QTY	104PCS/20 GP 224PCS/40 GP 270PCS/40 HQ

Home treadmill



SGS



EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters X4-430



Motor power

DC2.5HP



Voltage

220-240V/110-120V



Speed range

1.0-14KM/H



Running area

430X1200MM



G.W/N.W



Max. load capacity

110KG



Package size



Loading QTY


Home treadmill



SGS





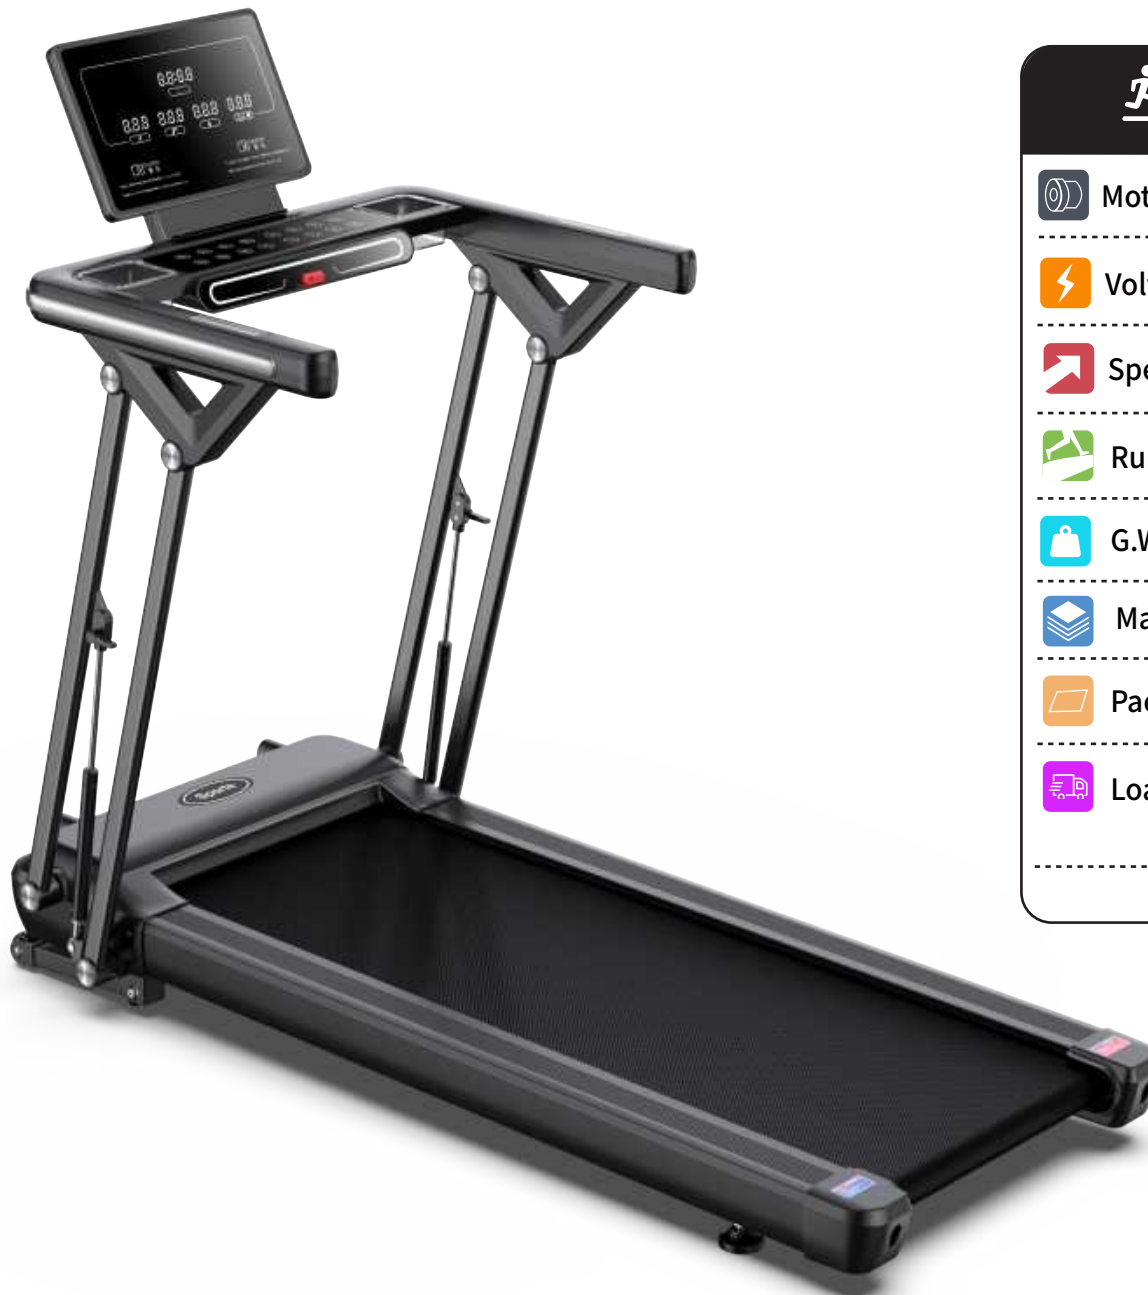





EN957 RoHS CE ISO9001:2015



TREADMILL SERIES



Device Parameters 0248

 Motor power	DC3.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-16KM/H
 Running area	480X1300MM
 G.W/N.W	72.5/63.5KG
 Max. load capacity	110KG
 Package size	1680X875X260MM
 Loading QTY	72PCS/20 GP 154PCS/40 GP 182PCS/40 HQ

Home treadmill



SGS











EN957 RoHS CE ISO9001:2015



TREADMILL SERIES



Device Parameters

 Motor power	DC2.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1050MM
 G.W/N.W	
 Max. load capacity	100KG
 Package size	
 Loading QTY	

Home treadmill



SGS



EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters



Motor power

DC2.5HP



Voltage

220-240V/110-120V



Speed range

1.0-12KM/H



Running area

400X1080MM



G.W/N.W



Max. load capacity

100KG



Package size



Loading QTY

Home treadmill



SGS











EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters

 Motor power	DC2.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1080MM
 G.W/N.W	
 Max. load capacity	100KG
 Package size	
 Loading QTY	

Home treadmill



SGS











EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



/Device Parameters A3-480

 Motor power	DC3.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-16KM/H
 Running area	480X1300MM
 G.W/N.W	67KG/59KG
 Max. load capacity	120KG
 Package size	1795X845X320MM
 Loading QTY	56PCS/20GP 118PCS/40GP 130PCS/40HQ

Optional AC motor









Home treadmill

 BSCI SGS  EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters 0748

 Motor power	DC3.5HP
 Voltage	220V/110V
 Speed range	1.0-16KM/H
 Running area	480X1300MM
 G.W/N.W	72.5KG/62KG
 Max. load capacity	120KG
 Package size	1795X845X340MM
 Loading QTY	48PCS/20GP 96PCS/40GP 116PCS/40HQ
Optional AC motor	









Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters A4-440

 Motor power	DC2.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-14KM/H
 Running area	440X1220MM
 G.W/N.W	53.6KG/45.9KG
 Max. load capacity	120KG
 Package size	1660X765X290MM
 Loading QTY	81PCS/20 GP 171PCS/ 40 GP 192PCS/ 40 HQ

Optional 15 section electric lifting function
and AC motor configuration




Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters B5-440D

 Motor power	DC2.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-14KM/H
 Running area	440X1220MM
 G.W/N.W	62KG/54KG
 Max. load capacity	100KG
 Package size	1660X765X290MM
 Loading QTY	81PCS/20 GP 171PCS/40 GP 192PCS/ 40 HQ

Optional 15 section electric lifting function
and AC motor configuration


Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters B6-440D

 Motor power	DC2.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-14KM/H
 Running area	440X1220MM
 G.W/N.W	53KG/45.5KG
 Max. load capacity	100KG
 Package size	1660X765X290MM
 Loading QTY	81PCS/20 GP 171PCS/40 GP 193PCS/ 40 HQ








Optional 15 section electric lifting
function and AC motor configuration

Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015



Device Parameters A9-400D

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12.8KM/H
 Running area	400X1020MM
 G.W/N.W	46KG/40KG
 Max. load capacity	100KG
 Package size	1410X765X254MM
 Loading QTY	108PCS/20GP 224PCS/40GP 246PCS/40HQ


Home treadmill



SGS





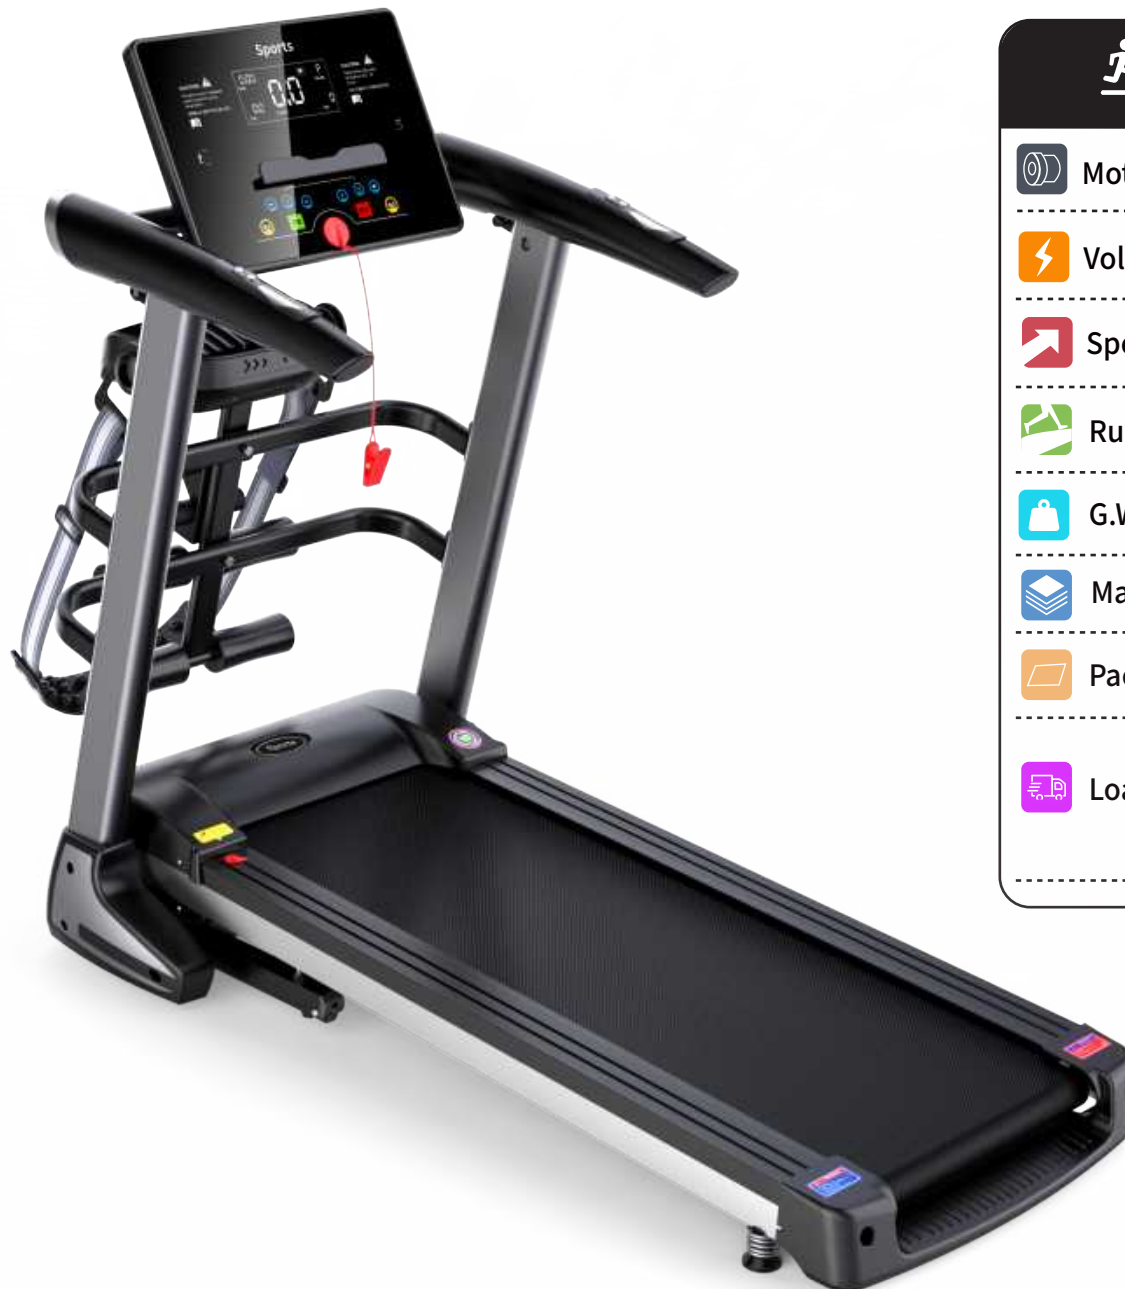





EN957 RoHS CE ISO9001:2015



TREADMILL SERIES



Device Parameters A8-400D

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12.8KM/H
 Running area	400X1020MM
 G.W/N.W	46.2KG/40.2KG
 Max. load capacity	100KG
 Package size	1410X765X254MM
 Loading QTY	108PCS/20GP 224PCS/40GP 248PCS/40HQ








Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters A6-400D

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12.8KM/H
 Running area	400X1020MM
 G.W/N.W	44KG/39.7KG
 Max. load capacity	100KG
 Package size	1410X765X254MM
 Loading QTY	108PCS/20GP 224PCS/40GP 246PCS/40HQ









Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters B1-4010D

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	40KG/35KG
 Max. load capacity重	100KG
 Package size	1415X655X285MM
 Loading QTY	114piece/20 GP 222piece/40 GP 254piece/40 HQ









Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES




Device Parameters B2-4010D

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	40KG/35KG
 Max. load capacity	100KG
 Package size	1415X655X285MM
 Loading QTY	114piece/20 GP 222piece/40 GP 254piece/ 40 HQ

Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES

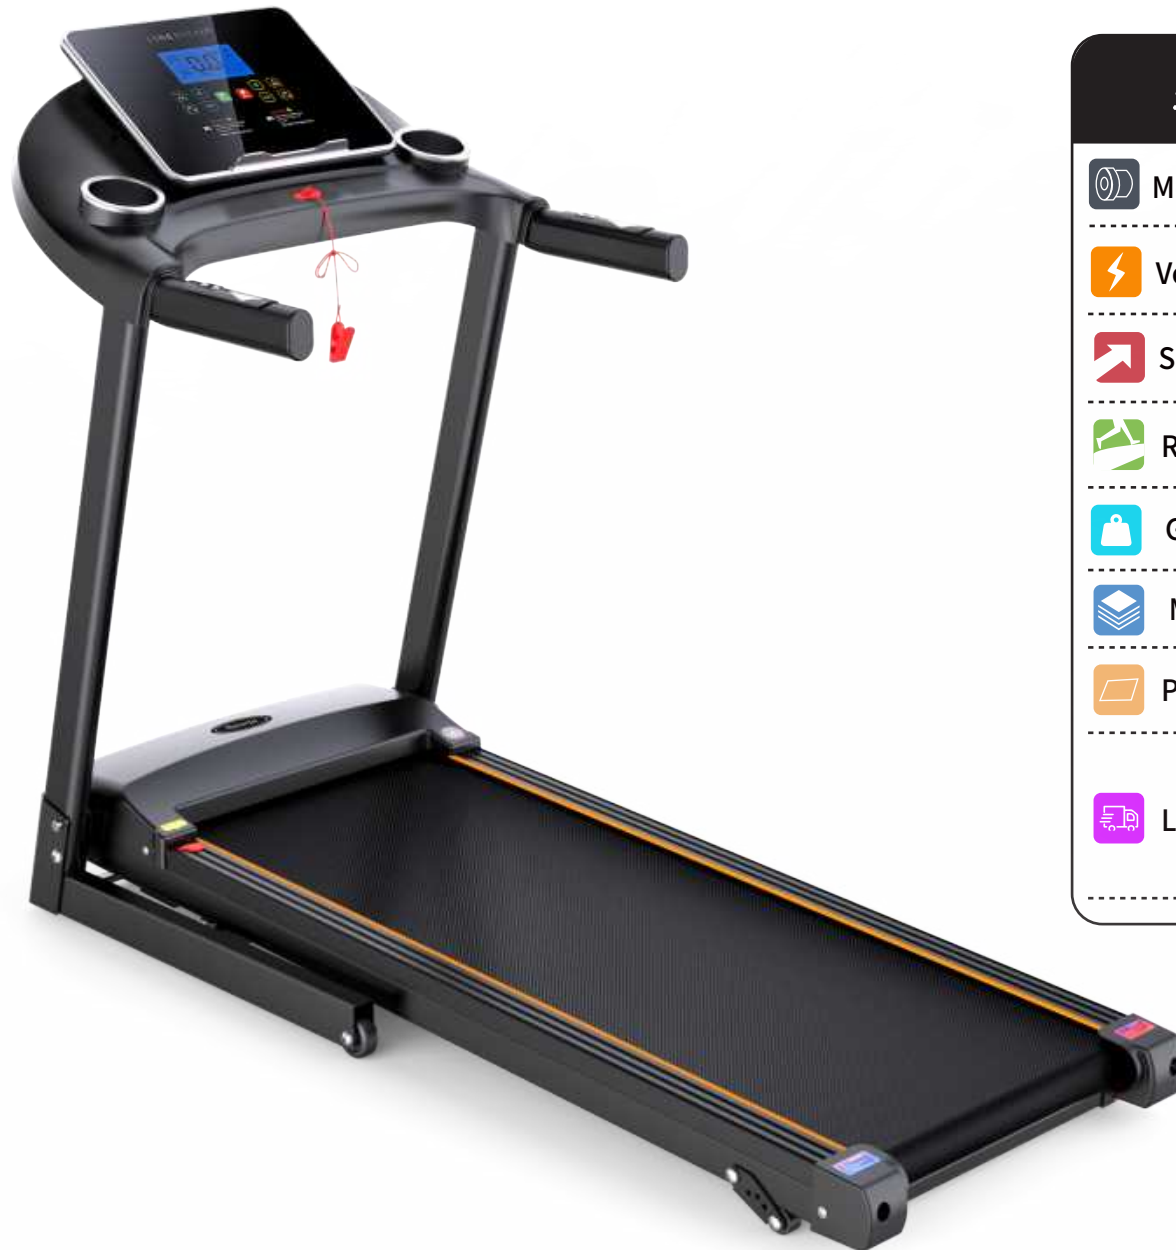

Device Parameters B4-4010

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	39KG/34KG
 Max. load capacity	100KG
 Package size	1415X695X245MM
 Loading QTY	108piece/20 GP 248piece/40 GP 272piece/ 40 HQ


Home treadmill



SGS





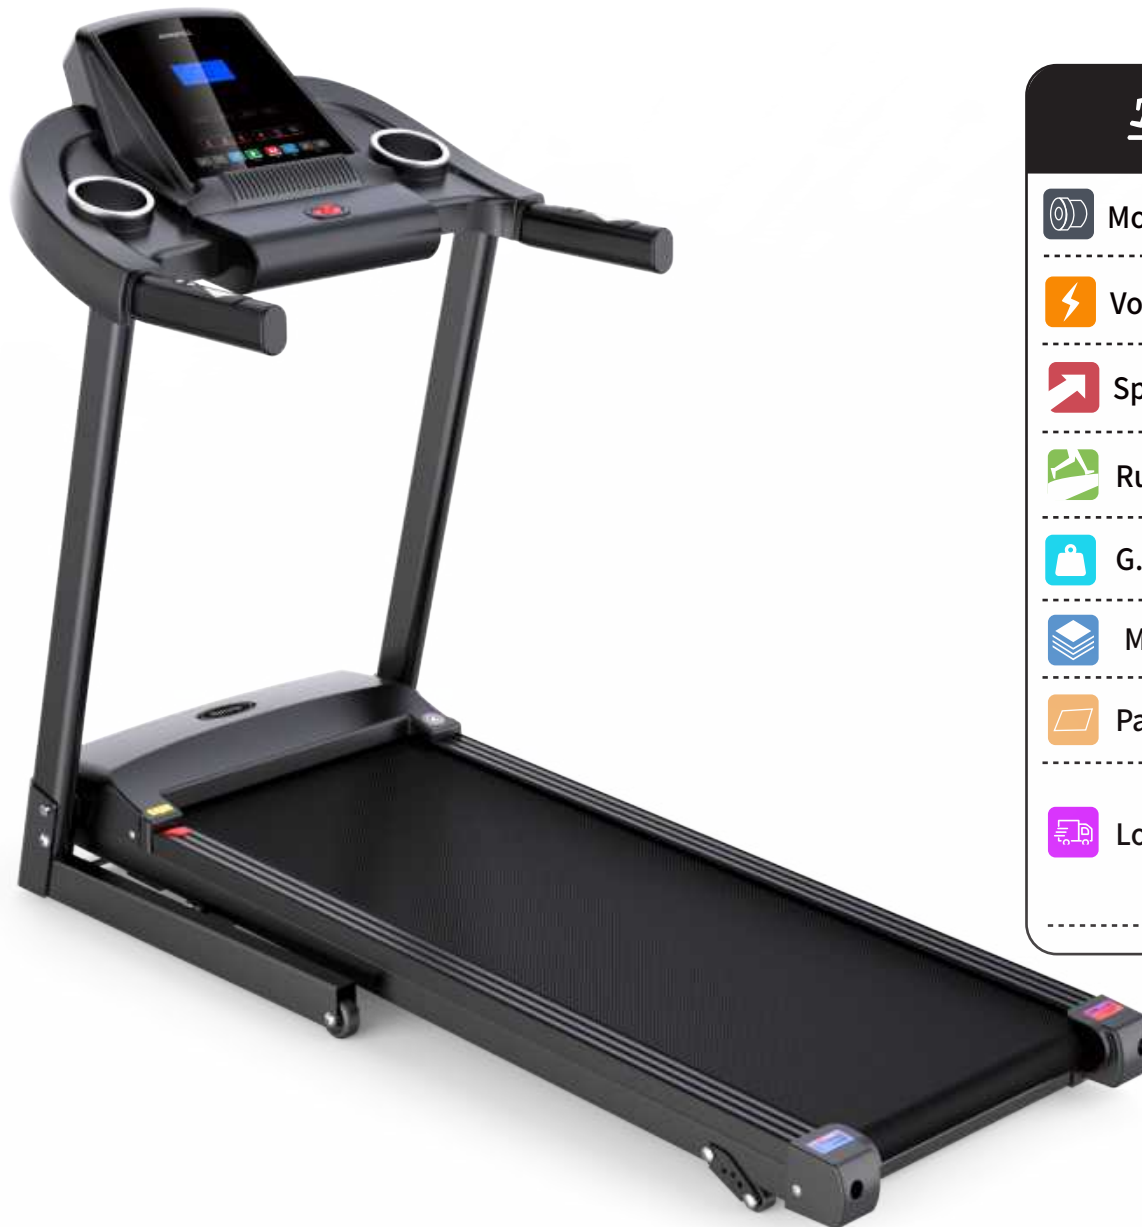





EN957 RoHS CE ISO9001:2015



TREADMILL SERIES



Device Parameters B5-4010

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	40KG/35KG
 Max. load capacity	100KG
 Package size	1415X695X245MM
 Loading QTY	120piece/20 GP 247piece/40 GP 273piece/40 HQ

Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015



Device Parameters B6-4010D



Motor power

DC2.0HP



Voltage

220-240V/110-120V



Speed range

1.0-12KM/H



Running area

400X1100MM



G.W/N.W

42.5KG/37.5KG



Max. load capacity

100KG



Package size

1415X695X285MM




Loading QTY

101piece/20 GP
208piece/ 40 GP
225piece/ 40 HQ





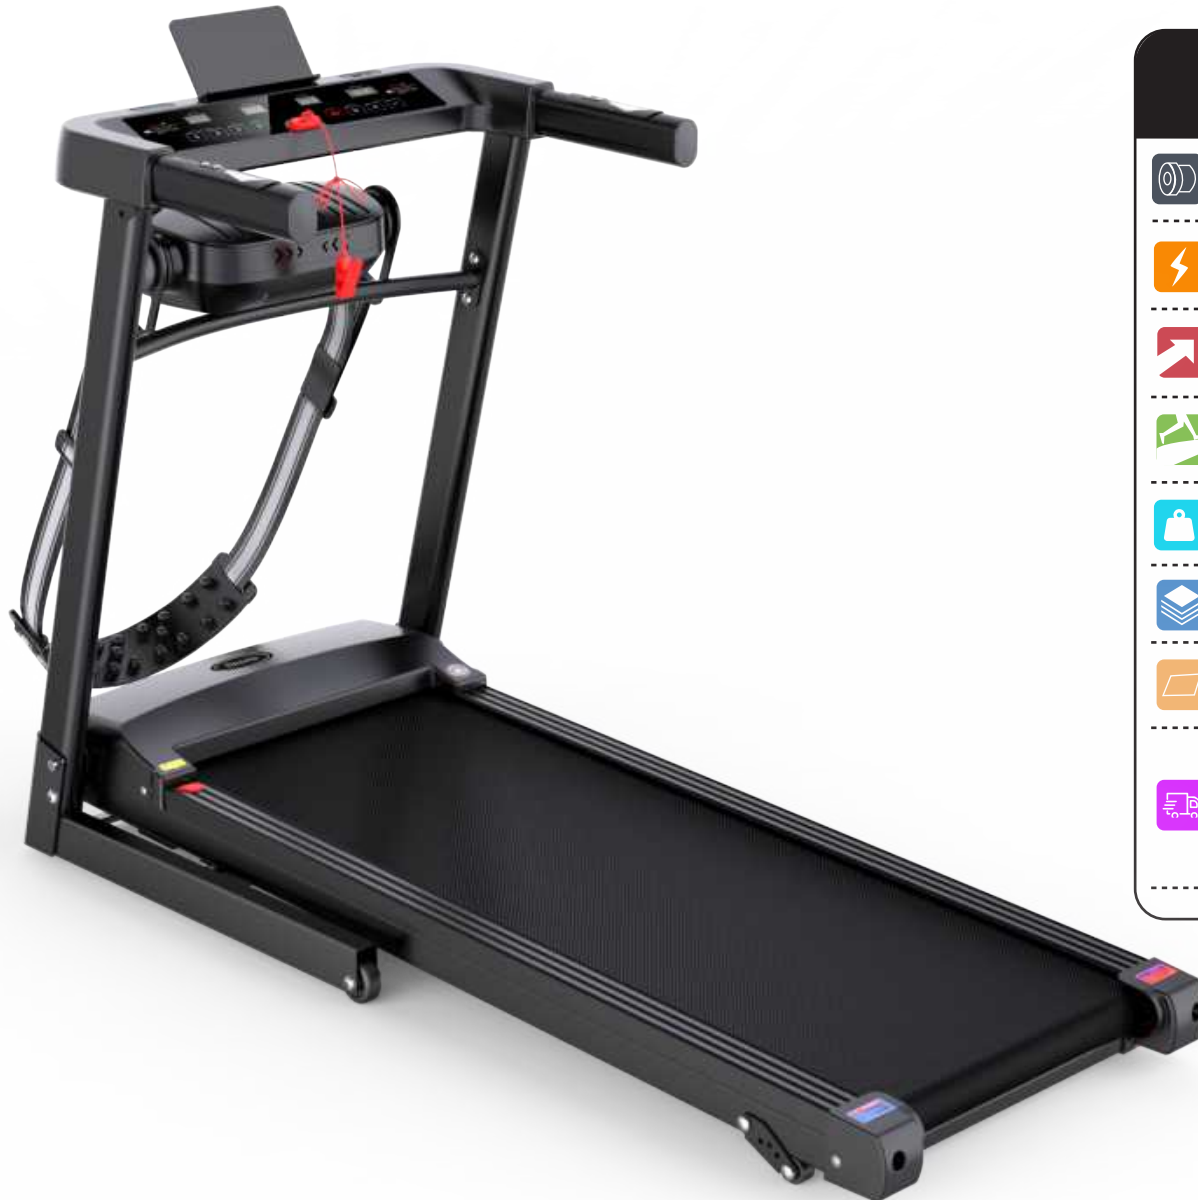


Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters B7-4010D

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	44KG/37.5KG
 Max. load capacity	100KG
 Package size	1450X665X265MM
 Loading QTY	108piece/20 GP 222piece/40 GP 278piece/40 HQ







Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters B8-400

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	35KG/30KG
 Max. load capacity	100KG
 Package size	1470X660X220MM
 Loading QTY	133PCS/20 GP 286PCS/40 GP 320PCS/40 HQ



Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters X3-460

 Motor power	DC2.5HP
 Voltage	220-240V/110-120V
 Speed range	1.0-6.0KM/H
 Running area	460X1200MM
 G.W/N.W	36KG/31KG
 Max. load capacity	100KG
 Package size	1590X730X175MM
 Loading QTY	140PCS/20 GP 305PCS/40 GP 350PCS/40 HQ









Home treadmill

 BSCI  SGS  RoHS  CE  ISO9001:2015

TREADMILL SERIES



/Device Parameters A1-430

 Motor power	DC2.0HP
 Voltage	240V/110V
 Speed range	1.0-6KM/H
 Running area	430X1200MM
 G.W/N.W	31KG/26.5KG
 Max. load capacity	100KG
 Package size	1560X695X165MM
 Loading QTY	168PCS/20 GP 350PCS/40 GP 396PCS/40 HQ








Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters Z1-401

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-6.0KM/H
 Running area	400X1100MM
 G.W/N.W	23KG/20KG
 Max. load capacity	100KG
 Package size	1505X645X165MM
 Loading QTY	187PCS/20 GP 387PCS/40 GP 432PCS/40 HQ

Home treadmill



SGS



EN957 RoHS CE ISO9001:2015



Device Parameters A2-430



Motor power

DC2.0HP



Voltage

220-240V/110-120V



Speed range

1.0-12KM/H



Running area

430X1200MM



G.W/N.W

30KG/35KG



Max. load capacity

100KG



Package size

1560X775X185MM



Loading QTY

347PCS/40 HQ

TREADMILL SERIES











Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters Z5-403

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	29KG/24KG
 Max. load capacity	100KG
 Package size	1500X640X165MM
 Loading QTY	187PCS/20 GP 387PCS/40 GP 432PCS/40 HQ









Home treadmill

BSCI SGS EN957 RoHS CE ISO9001:2015

TREADMILL SERIES



Device Parameters Z1-403

 Motor power	DC2.0HP
 Voltage	220-240V/110-120V
 Speed range	1.0-12KM/H
 Running area	400X1100MM
 G.W/N.W	29KG/24KG
 Max. load capacity	100KG
 Package size	1505X645X175MM
 Loading QTY	187PCS/20 GP 387PCS/40 GP 432PCS/40 HQ

Household inversion table






BSCI SGS EN957 RoHS CE ISO9001:2015

HANDSTAND



Device Parameters

6301-A

 G.W/N.W	30KG/25KG
 Product	1375X720X1690MM
 Package size	1320X760X125MM
 Max. load capacity	150KG
 Loading QTY	247PCS/20 GP 513PCS/40 GP 567PCS/40 HQ

Household inversion table






BSCI SGS EN957 RoHS CE ISO9001:2015
Business Social Compliance Initiative

HANDSTAND



Device Parameters

6302-A

 G.W/N.W	30KG/25KG
 Product	1375X720X1690MM
 Package size	1320X760X125MM
 Max. load capacity	150KG
 Loading QTY	180PCS/20 GP 360PCS/40 GP 420PCS/40 HQ

Household inversion table



SGS








EN957 RoHS CE ISO9001:2015

HANDSTAND



Device Parameters

6303

 G.W/N.W	24KG/22KG
 Product	1130X790X1520MM
 Package size	1250X820X100MM
 Max. load capacity	150KG
 Loading QTY	278PCS/20 GP 583PCS/40 GP 682PCS/40 HQ

Household inversion table



SGS








EN957 RoHS CE ISO9001:2015

HANDSTAND



Device Parameters

6304

 G.W/N.W	24KG/22KG
 Product	1130X790X1520MM
 Package size	1250X820X100MM
 Max. load capacity	150KG
 Loading QTY	278PCS/20 GP 583PCS/40 GP 682PCS/40 HQ

Household inversion table



SGS








EN957 RoHS CE ISO9001:2015

HANDSTAND



Device Parameters 6305

 G.W/N.W	24KG/22KG
 Product	1130X790X1520MM
 Package size	990X550X150MM
 Max. load capacity	150KG
 Loading QTY	340PCS/20 GP 707PCS/40 GP 829PCS/40 HQ

Household inversion table



SGS








EN957 RoHS CE ISO9001:2015

HANDSTAND



Device Parameters 6306

 G.W/N.W	24KG/22KG
 Product	1130X790X1750MM
 Package size	1250X820X100MM
 Max. load capacity	150KG
 Loading QTY	278PCS/20 GP 583PCS/40 GP 682PCS/40 HQ

Household inversion table






BSCI SGS EN957 RoHS CE ISO9001:2015
Business Social Compliance Initiative

HANDSTAND



Device Parameters

6307

 G.W/N.W	26.5KG/24.5KG
 Product	1130X790X1750MM
 Package size	1250X820X120MM
 Max. load capacity	150KG
 Loading QTY	535PCS/40 HQ